


Underwater Halogen Lamp


Hi-Creen Unilight

Key Features

1. Double-bulb structure to endure in highwater pressure.(Max200m)
2. Quake-resistant filament prevents line breakage/blackening and last longer.
3. Compact design to minimize the current flow.Easy to handle.
4. Easy to dim and increases efficiency of fishing when using dimmer.

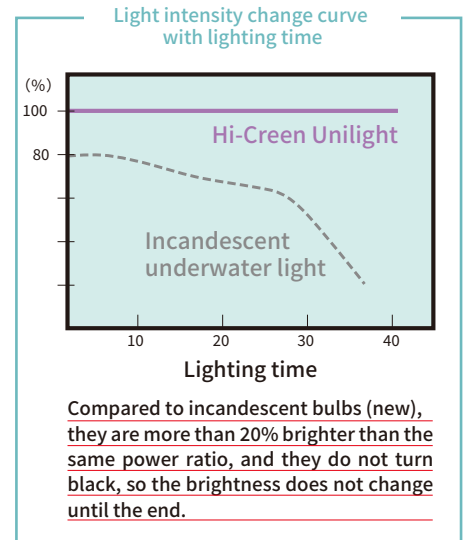


QWS1-100/200

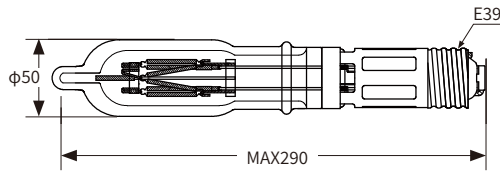


Specification		
	QWS1-100	QWS1-200
Rated Voltage	100V	200V
Recommended Input Voltage	120V	240V
Rated Wattage	1,000W	3,000W
Water Depth	100m	100m

QWS2-100/200

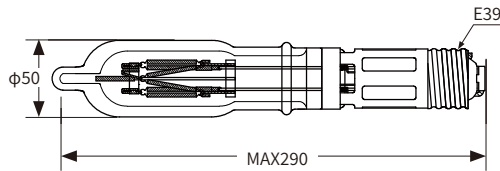


Specification		
	QWS2-100	QWS2-200
Rated Voltage	100V	200V
Recommended Input Voltage	120V	240V
Rated Wattage	2,000W	2,000W
Water Depth	100m	100m

QW3-100/200

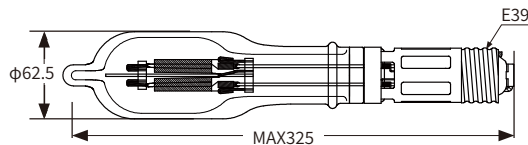

Specification		
	QW3-100	QW3-200
Rated Voltage	100V	200V
Recommended Input Voltage	120V	240V
Rated Wattage	3,000W	3,000W
Water Depth	200m	200m

QW5-200

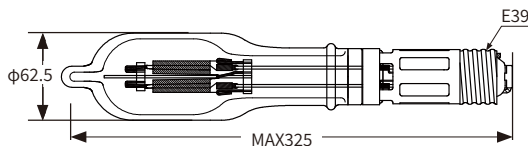

Specification	
	QW5-200
Rated Voltage	200V
Recommended Input Voltage	240V
Rated Wattage	5,000W
Water Depth	200m